


F-Si (2019)

CARBON

Item	Specification
Head Tube	UPR: 1 -1/8 in, LWR: 1-1/2 in
Headset	Integrated, 1-1/8 in - 1-1/2 in
Bottom Bracket: Type/ Width	PF30 / 83 mm
Front Derailleur	Direct Mount, Side-Swing
Seat Post: Dia./Binder	27.2 mm / Internal Wedge
▲ Seat Post Insert: Min. /Max	100 mm / 220 mm
▲ Max. Tire Width	29 in x 2.35 in
▲ Max. Fork Length:	510 mm
Chain Guide	N/A

Rear Brake: Mount Type / Min/Max Rotor Dia.	Flat Mount / 140 mm / 160 mm
Rear Axle: Type/Length	Speed Release, Single Lead 148 x 12 mm, 165 mm Length
Ai Offset:	Rear Wheel: 3 mm Offset to NDS SRAM Chaining: +6 mm Offset Hollowgram SpideRing: Ai Offset
▲ Intended Use:	ASTM CONDITION 3, Cross- Country, Marathon, Hardtails
▲ Max. Weight Limit: Total (rider+all equipment):	305 lbs / 138 kg

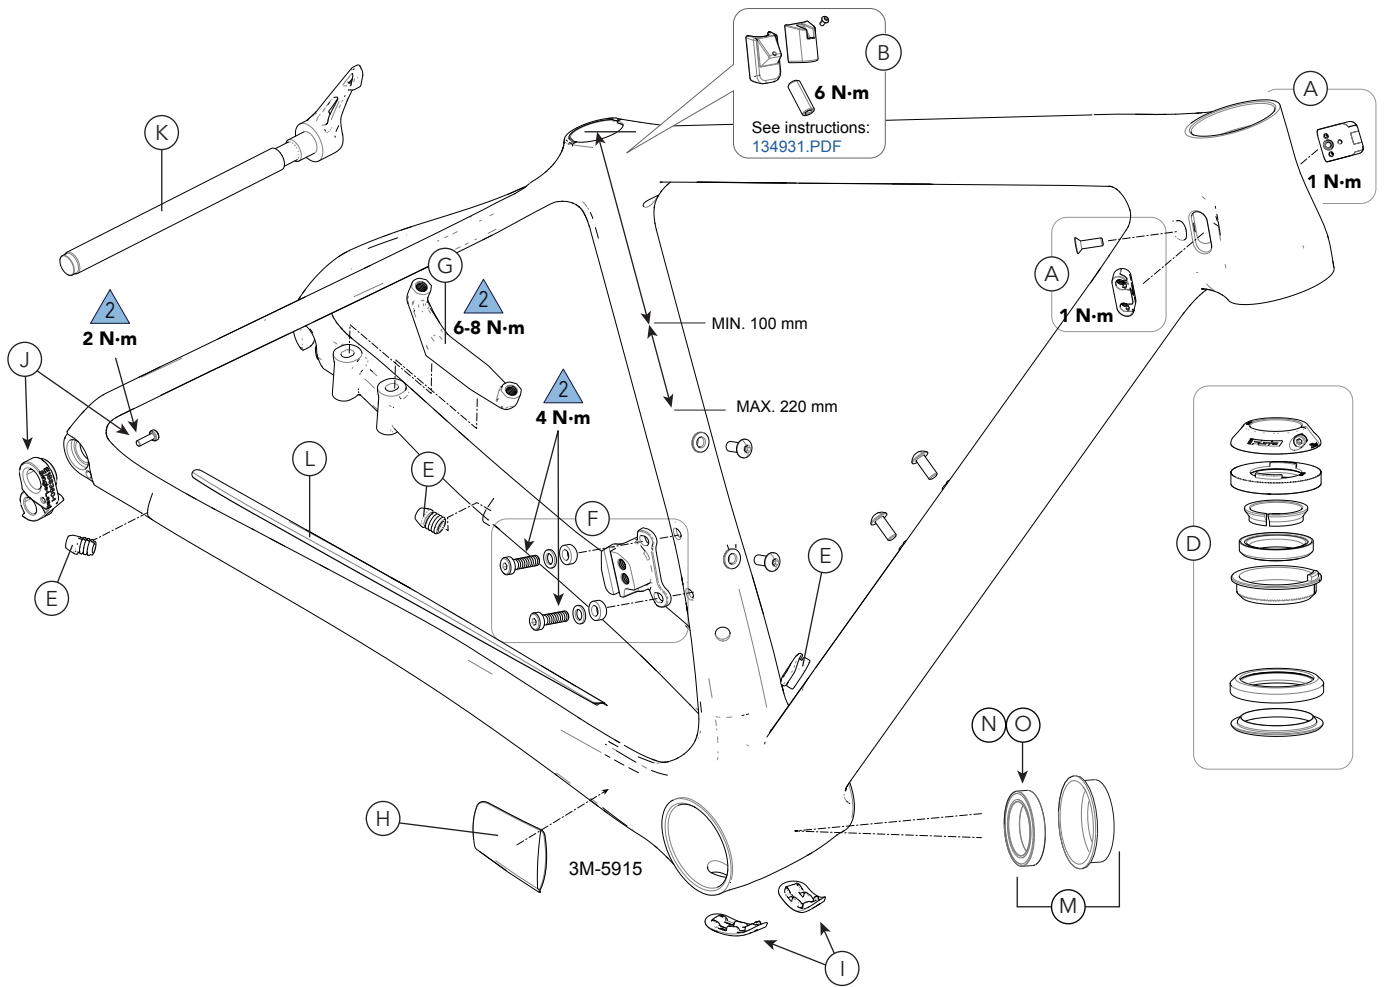

ID	Part Number	Description
A	KP456/	Modular Cable Guides Headtube
B	K26058	27.2 Internal Seat Binder
-	K35029	Headset 1-1/8 to 1.5 with 36 Deg CR (M-XL Frames)
D	K35048	Headset 1-1/8 To 1.5 Steer Stop (XS-S Frames)
E	K32048	Shift and Cable Grommets
F	K33048	F-Si Front Derailleur Hanger
G	KP421/160	Brake Mount Flat 160 mm
H	K34028	F-Si Chainsuck Protector

ID	Part Number	Description
I	K32038	F-Si Bottom Bracket Cable Guide
J	K33049	Derailleur Hanger TA ST SS 073
K	K83028	Speed Release Thru Axle 148x12
L	K34299	F-Si Chainstay Protector
M	KP197/SRM	PF30 Bottom Bracket Cups And Bearings
N	KB6180/	BB30 Bearing Blue (QTY 2)
O	K22037	BB30 Bearing Blue (QTY 24)
-	K35009	SL Compression Plug With Top Cap